
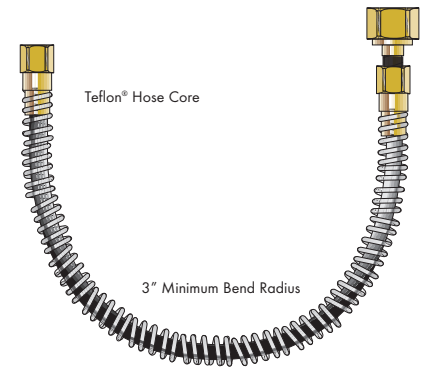


SERVICE	PART NO.	DESCRIPTION	WORKING PRESSURE
-	PF-4	1/4" NPT F x 1/4" F with Spring Guard: Add B to End of Part No.	0-3000
COMPLETE ASSEMBLIES			
CGA-296	PF-296 PF-296B PF-296CV PF-296HT	Ind. Mixtures, RH Male with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-300	PF-16 PF-16CV	Commercial Acetylene, RH Female with Check Valve, Inlet	0-500
CGA-320	PF-320 PF320B PF-320HT PF-16HT	Carbon Dioxide, RH Female with Spring Guard with Hand Tight Nut, One End with Hand Tight Nut, One End	0-3000
CGA-326	PF-326 PF326B PF-326CV PF-326HT	Nitrous Oxide, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-346	PF-346 PF-346B PF-346CV PF-346HT	Air, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-347	PF-347 PF-347B PF-347CV PF-347HT	Air, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-5500
CGA-510	PF-15 PF-15CV PF-15HT	POL Acetylene, LH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	0-500
CGA-540	PF-63 PF-63B PF-63CV PF-63HT	Oxygen, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-577	PF-577 PF-577B PF-577CV PF-577HT	Oxygen, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-4000
CGA-580	PF-92 PF-92B PF-92CV PF-92HT	Nitrogen, Argon, RH Male with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-590	PF-93 PF-93B PF-93CV PF-93HT	Industrial Air, LH Male with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-680	PF-680 PF-680B PF-680CV PF-680HT	Inert Gases, RH Male with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-5500
CGA-701	PF-701 PF-701B PF-701CV PF-701HT	Oxygen, RH Female with Spring Guard with Check Valve, Inlet Side with Hand Tight Nut, One End	4001-5500

**STAINLESS STEEL FLEXIBLE
PIGTAILS, BRASS CONNECTIONS**

- **SUB ASSEMBLY FOR SPECIAL CONFIGURATIONS**
- **AVAILABLE IN A VARIETY OF LENGTHS**
- **100% TESTED AND CLEANED FOR OXYGEN SERVICE**
- **FOR HOSE SPECIFICATIONS SEE PAGE 64**

Type 304 SS Braid

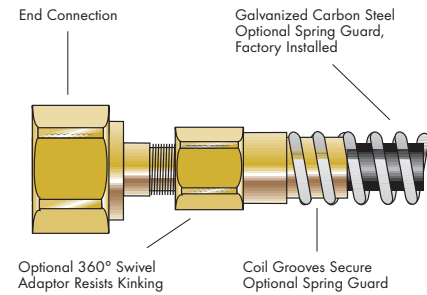

**HOW TO ORDER
PF-XXX-XX-X**

END CONNECTIONS From CGA Listing Below	LENGTH 18", 24", 36", 48" (Note: Lengths Do Not include Connections)	OPTIONS B = Spring Guard B1 = Spring Guard, With Inlet Swivel Adaptor B2 = Spring Guard, With Outlet Swivel Adaptor
---	---	--

PART NO.		DESCRIPTION	MAX PSIG	GAS SERVICE
COMPLETE ASSEMBLIES 100% TESTED				
PFS-83		Hydrogen, LH F	0-3000	CGA-350
PFS-83CV		with Check Valve, Inlet Side		
PFS-92		Helium, RH M	0-3000	CGA-580
PFS-92CV		with Check Valve, Inlet Side		

**THERMOPLASTIC FLEXIBLE
PIGTAILS, NYLON LINED,
BRASS CONNECTIONS**

PART NO.		DESCRIPTION	MAX PSIG	SERVICE
COMPLETE ASSEMBLIES 100% TESTED & OXYGEN CLEANED				
PF-346SS		Air, RH F	3000	CGA-346
PF-347SS		High Pressure Air, RH F	5500	CGA-347
PF-350SS		Hydrogen, Natural Gas, LHF	3000	CGA-350
PF-540SS		Oxygen, RH F	3000	CGA-540
PF-580SS		Argon, Nitrogen, Etc, RH M	3000	CGA-580
PF-590SS		Air, Nitrogen, Etc, LH M	3000	CGA-590
PF-4SS		1/4" NPT Female to 1/4" NPT F	6000	-
PH-3		Chrome Plated brass Handle with Set Screw, Prevents Twisting when Tightening		

**STAINLESS STEEL FLEXIBLE
PIGTAILS, TEFLON LINED,
STAINLESS STEEL CONNECTIONS**

See page 68 for hose specifications

PART NO.		DESCRIPTION	LENGTH
100% TESTED & CLEANED FOR OXYGEN * INDIVIDUALLY POLY BAGGED 3" MINIMUM BEND RADIUS			
PF2-4-12		1/4" NPT Female End Connections	12"
PF2-4-18		1/4" NPT Female End Connections	18"
PF2-4-24		1/4" NPT Female End Connections	24"
PF2-4-36		1/4" NPT Female End Connections	36"
PF2-4-48		1/4" NPT Female End Connections	48"
PF2-4-60		1/4" NPT Female End Connections	60"
PF2-4-72		1/4" NPT Female End Connections	72"

**STAINLESS STEEL FLEXIBLE
PIGTAILS, BRASS CONNECTIONS**
PRESSURES TO 3000 PSIG (20,700 kPa)

No Specials Available

PART NO.		DESCRIPTION	LENGTH
100% TESTED & CLEANED FOR OXYGEN * INDIVIDUALLY POLY BAGGED 2-3/4" MINIMUM BEND RADIUS			
HPF-4-18		1/4" NPT F x 1/4" NPT F	18"
HPF-4-24		1/4" NPT F x 1/4" NPT F	24"
HPF-4-36		1/4" NPT F x 1/4" NPT F	36"
HPF-4-48		1/4" NPT F x 1/4" NPT F	48"

**STAINLESS STEEL FLEXIBLE
PIGTAILS, STAINLESS STEEL
CORRUGATED INNER CORE,
STAINLESS STEEL CONNECTIONS**
PRESSURES TO 3000 PSIG (20,700 kPa)

See page 66 for hose specifications